

# CONVEYOR BELT BEARINGS

**Poly-Round<sup>®</sup> bearings are the solution for all your sprocket driven conveyors**



- 100% grease free
- 100% rust free
- USDA-accepted sanitary design
- Longer life with zero maintenance
- Predictable wear allows planned maintenance rather than emergency replacement
- Engineered for today's food safety needs



BY TIMKEN


# EDT Poly-Round® bearings for conveyor belts

## Three choices of housing materials

- Machined stainless
- Cast stainless
- Polymer (blue or gray)

Housings have smooth surfaces for easy cleanability

Poly-Round® inserts are available in a wide range of materials for temperatures from -500°F to +500°F (-295°C to 260°C). Also available in metal detectable materials

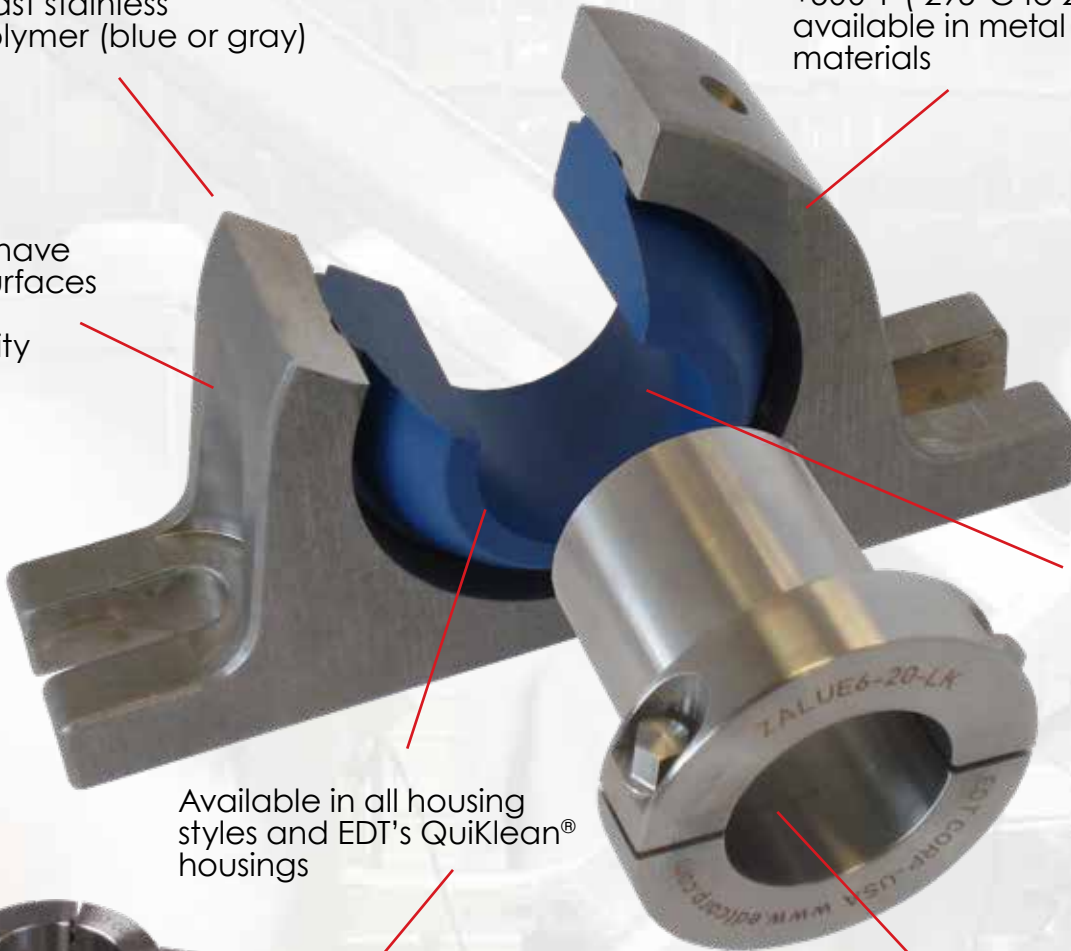

Shaft sizes from 1/2" to 3" 15mm to 90mm

Available in all housing styles and EDT's QuikClean® housings



DoubleLock® sleeve locks the collar to the shaft and extends bearing life. USDA-accepted design

For assistance selecting the best bearing for your application, complete a **Bearing Design Checklist (BDC)**

<http://tinyurl.com/edtbdc>



BY TIMKEN