

EDT BEARINGS FOR SNACK FOOD PRODUCTION


EDT bearing products help keep production running crisply



Fryer paddle bearings run 12/24 months and won't lose balls in the oil



Peeler bearings are ideal for output end of potato peelers

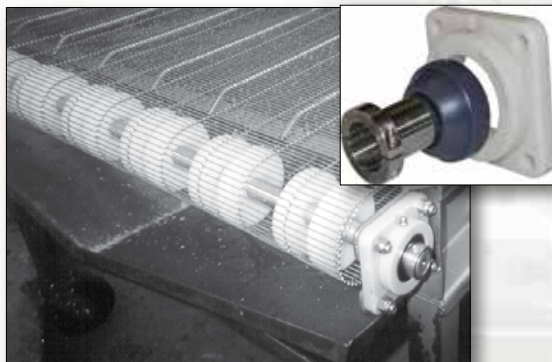

Poly-Round® Solution® bearings of all styles and sizes are guaranteed for 1 year on modular belt conveyors



Polymer block bearings of all styles and sizes are designed to withstand impact

Grease-less bearing products you can rely on 24/7

- Designed for cleanability
- Unaffected by wash-down
- Eliminate re-greasing
- Avoid process contamination
- More up-time with no catastrophic bearing failure
- Predictable longevity and maintenance scheduling



On sprocket-driven modular plastic and wire belt conveyors, **EDT GUARANTEES** the NA Poly-Round® bearing to last 1 year, or EDT will replace it with the bearing of your choice.



Poly-Round® Plus inserts allow easy retrofit of ball bearing into most brands of housings




BY TIMKEN



FAB14C-1



FA1012 / FA1013



NB1408 / FA1408



Fryer bearing



NA2GC7-1-LC



FA Poly-Round® Plus



Scale links



PA1MB



ZA237.3A QF247F

EDT Part #


B-26097	Stat weigher bushing
NA2432-2	34360-24 bottom bushing for agitator 2-7/16" OD x 3-1/4" long for 2" shaft
NA1703-7/8	34360-27 fryer take-out conveyor bearing (temp to 180°) 1.75 OD x 1/4" x 7/8" ID
NAW3013-1/2"	Corn washer hold-down wheel 3" OD x 1.1" wide with 1-3/8" hub width, 1/2" ID
QF1207-3/8	CYR 1-1/4S yoke interchange: 1-1/4" OD x 3/4" long for 3/4" shaft
FA1207-3/8	CYR 1-1/4S yoke interchange: 1-1/4" OD x 3/4" long for 3/4" shaft
FAB14C-1	BH1620 fryer arm tensioner 1-3/8" OD x 1-1/4" long for 1" shaft
FAF0810-1/2	Heat and Control conveyor bearing 5/8" OD x 1" long, 3/4" OD flange, 1/2" shaft
FAF1012-1/2	Idler sprocket brg for fryer paddle on fryer 3/4" OD x 1-28" with 1" flange for 1/2" ID
FAF1013-1/2	Idler sprocket Heat and Control J2-3044-C25-1 3/4" OD x 1.31" with 1" flange for 1/2" ID
FAF2028-1-7/16	Deoiler idler support bushing 1-3/4" OD x 2-7/8" long with 2" flange, 1-7/16" shaft
FA1408-1/2	1621-2RS x 2 seasoning spinner bearing 1-3/8" OD x .78 wide x 1/2"
NB1408-1/2	1621-2RS x 2 seasoning spinner bearing 1-3/8" OD x .78 wide x 1/2"
FAW1801-1	High temp thrust bearing 1-7/8" OD x 1/8" thick for 1" shaft
FP115-1	Casa Herrera oven guide roller bushing 1.48 OD x 1-1/2 long for 1" shaft
FG0815-5/8	High-temp bushing 7/8" OD x 1-1/2" long for 5/8" shaft
FA.25x2x1	High temperature 2" wide wear strip: 1/4" thick by 1" long
EDT0199	Octogan roller, chip separator, white plastic 1-7/8" wide x 2" long for 1-1/4" shaft
FA2AE7-23-LK	Heat and Control fryer paddle bearing, 1-7/16" shaft (also 1-1/4" or 35mm)
FA2AD7-19-LK	Heat and control fryer paddle bearing, 1-3/16" shaft (1-1/4" or 30mm)
FA2AG7-27-LK	Heat and Control fryer paddle bearing, 1-11/16" shaft (also 1-5/8" or 45mm)

NA6GA7-5/8	Poly-Round® Solution® conveyor small 2-bolt, 5/8" shaft
NA2GC7-1-LC	Poly-Round® Solution® conveyor standard 2-bolt, 1" shaft

FAIPD7-D	"FA" for submerged hight temp
FAIPE7-E	"NA" for ambient temperature
FAIAG7-G	

Poly-Round® inserts are the wear component in mounted bearings. After inserts wear, rotate 180°, then replace just the insert; reuse the housing.

Ishida# 4K-59398-1, EDT: B xx 30##
Ishida# 4K-59398-2, EDT: B xx 26##
= center distance xx = color identifier 30 (large) or 26(short)



Links for Ishida scales – Select from variety of colors to uniquely identify each packaging line

P ink	D ark B lue	L ight G reen	Y ellow	G raY
R eD	L ight B lue	D ark G reen	O raNge	B lacK
D k P urple	L ight P urple	N eon G reen	N eon O range	W hiTe
T aN	B rown			

PA1MB-3/4	} Block bearings for Heat and Control conveyors
PA1MB-1-3/16	
PA1NEO-1-7/16	
PA4GCO-1	1" 4-bolt conveyor bearing

VanMark Peeler bearings for brushes on output end of peeling drum

ZA237.3A
QF247F
ZAH248H or ZAH248G (depending on peeler model)
PATUPB-01 tool enables flange bearing replacement (reuse housing)



BY TIMKEN